


Exude R

LED office and education lights


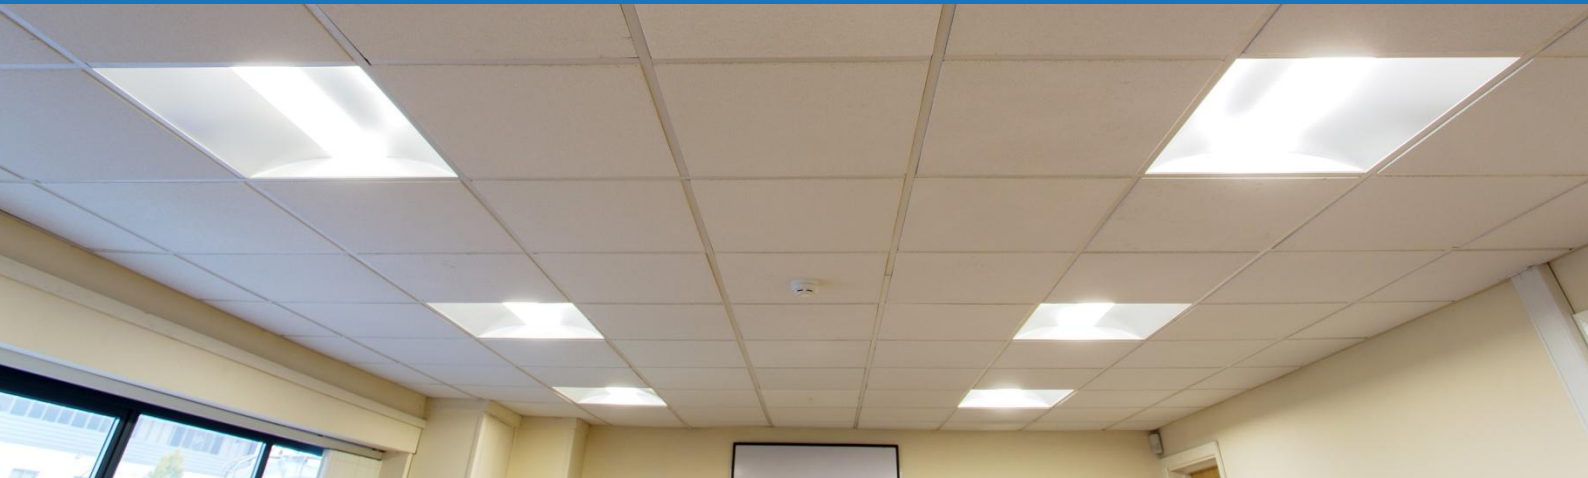


The Exude recessed range is designed to install into standard exposed T-ceiling grids, replacing T8 and T5 louvred luminaires found commonly in offices and retail outlets. The unique design of the Exude R offers a glare-free, optimal lit environment and benefits from low operating costs.

- **Up to 74% efficiency gains versus comparative fluorescent**
- Energy efficient low power consumption, even for the HO options
- Evenly lit working and retail environments
- Low glare exude diffuser
- Fits exposed T-ceilings as standard, other ceiling systems accommodated



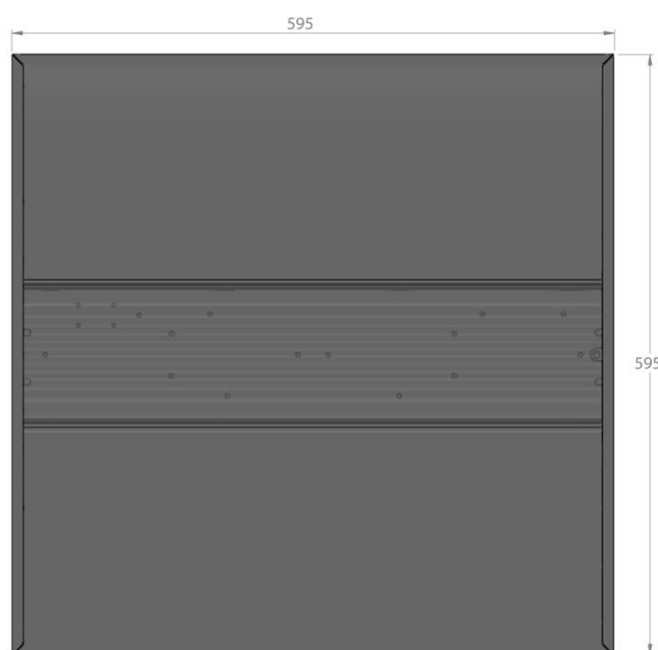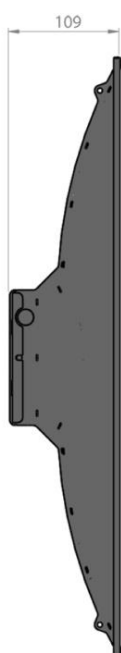


Range design



Exude R

LED office and education lights

Range specification data

	Exude R600 100	Exude R600 300	Exude R1200 100	Exude R1200 300
Specification				
 Alternative to	T8/T5 louvred luminaires	T8/T5 louvred luminaires	T8/T5 louvred luminaires	T8/T5 louvred luminaires
 Efficiency	74%	73%	71%	70%
 Maintenance	Low	Low	Low	Low
 Dimensions (mm)	595 x 595 x 109 mm	595 x 595 x 109 mm	1195 x 595 x 109 mm	1195 x 595 x 109 mm
 IP Rating	40	40	40	40
 Lumen output	2,636 lm	4,820 lm	5,273 lm	9,641 lm
 Power consumption	28 W	49 W	54 W	98 W
 System efficiency	94 l/cW	98 l/cW	98 l/cW	98 l/cW
 CRI	>80	>80	>80	>80
 Colour temperature	4000K	4000K	4000K	4000K
 Flicker-free	Yes	Yes	Yes	Yes
 Instant start up	Yes	Yes	Yes	Yes
 Warranty	5 years	5 years	5 years	5 years
 Lifespan estimate	50,000 hours	50,000 hours	50,000 hours	50,000 hours
Mount Options				
Suspended	✗	✗	✗	✗
Surface	✗	✗	✗	✗
BESA	✗	✗	✗	✗
Exposed T Ceilings	✓	✓	✓	✓
Options				
Low glare diffuser as standard	✓	✓	✓	✓
Integral Emergency	✓	✓	✓	✓

All Constant Lighting luminaires are designed and manufactured in Manchester allowing us to have the ability to tailor our designs to match your exact requirements.