

# Exude S

## Corridors and small halls




The Exude Surface range is designed to offer a professional lighting option for installations onto solid or plasterboard ceilings ideal for corridors.

- **Up to 74% efficiency gains versus comparative fluorescent**
- Energy efficient low power consumption, including the HO options
- Low glare exude diffuser
- Surface mounted fitting, ideal for solid ceiling installations



## Range design

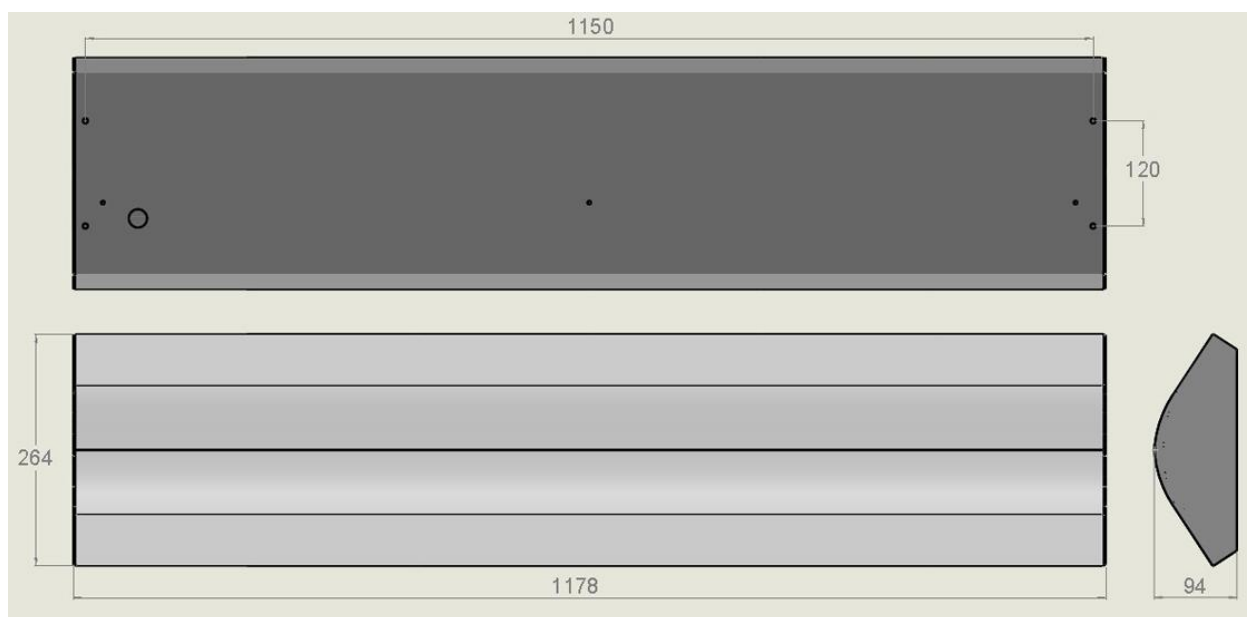

# Exude S

## Corridors and small halls

### Range specification data

	Exude S1200 100	Exude S1200 300
<b>Specification</b>		
 Alternative to	T8/T5 louvred surface luminaires	T8/T5 louvred surface luminaires
 Efficiency	71%	70%
 Maintenance	Low	Low
 Dimensions (mm)	1178 x 264 x 94 mm	1178 x 264 x 94 mm
 IP Rating	20	20
 Lumen output	5,273 lm	9,641 lm
 Power consumption	54 W	98 W
 System efficiency	94 l/cW	98 l/cW
 CRI	>80	>80
 Colour temperature	4000K	4000K
 Flicker-free	Yes	Yes
 Instant start up	Yes	Yes
 Warranty	5 years	5 years
 Lifespan estimate	50,000 hours	50,000 hours
<b>Mount Options</b>		
Suspended		
Surface		
BESA		
Exposed T Ceilings		
<b>Options</b>		
Low glare diffuser <b>as standard</b>		
Integral Emergency		

All Constant Lighting luminaires are designed and manufactured in Manchester allowing us to have the ability to tailor our designs to match your exact requirements.