


Exude W

Corridors & low ceilings




The Exude Wall range, Exude W, is the perfect solution for low ceiling solutions, as well as corridors, and stairways. Easy wall mount installation. It boasts an asymmetric output design to light spaces with low ceilings effectively and available in two lengths.

- **Up to 74% efficiency gains versus comparative fluorescent**
- Perfect replacements of 2D/T8 amenity lighting
- Evenly lit environments
- Low glare exude diffuser
- Optional warm white colour temperature

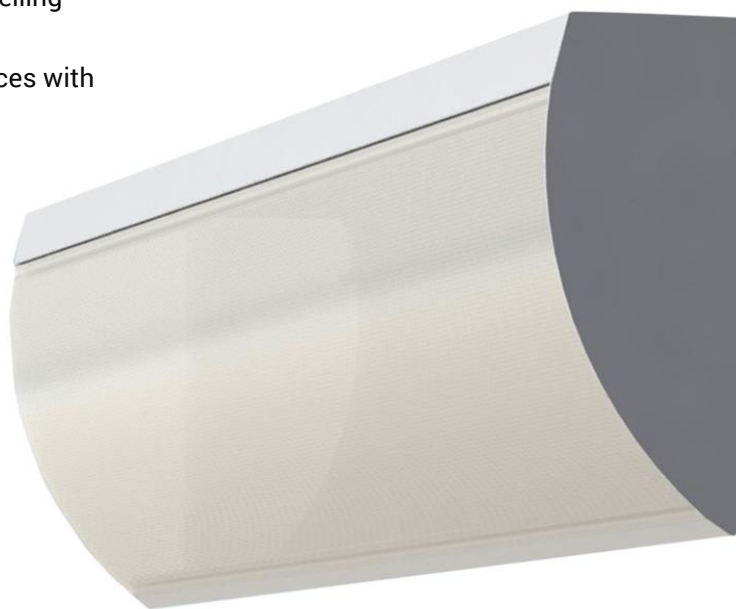



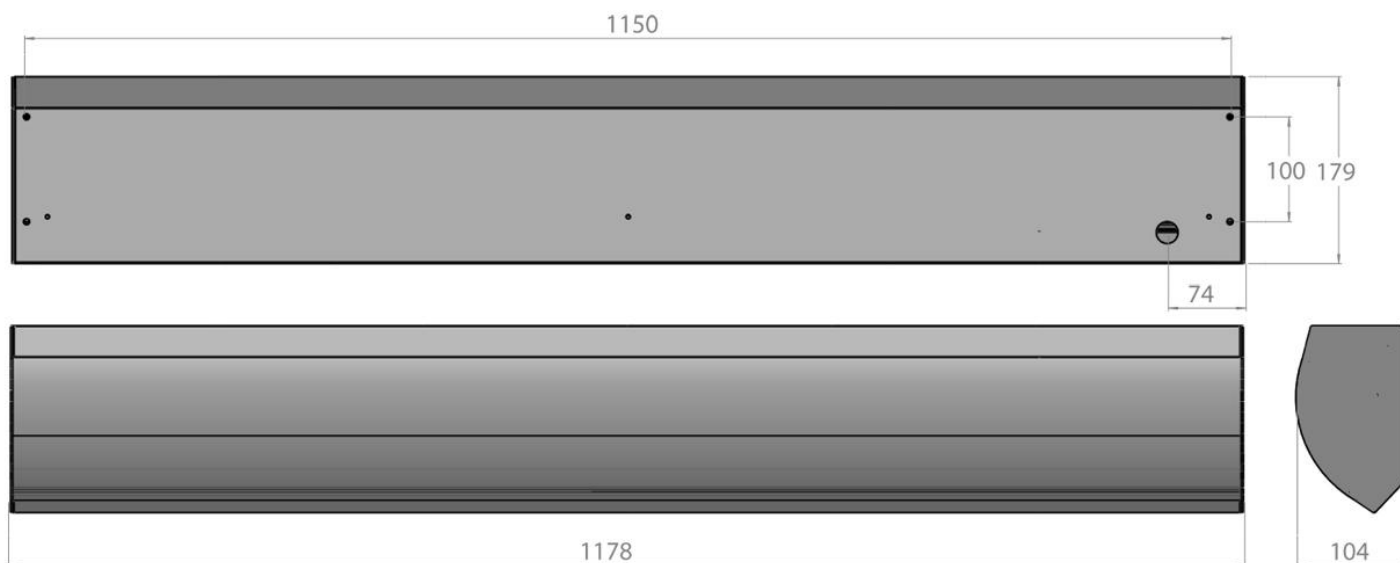







Range design



Exude W

Corridors & low ceilings

Range specification data

	Exude W600 100	Exude W1200 300
Specification		
 Alternative to	2D/T8 Amenity	2D/T8 Amenity
 Efficiency	74%	71%
 Maintenance	Low	Low
 Dimensions (mm)	617 x 179 x 104 mm	1178 x 179 x 104 mm
 IP Rating	20	20
 Lumen output	2,636 lm	5,273 lm
 Power consumption	28 W	54 W
 System efficiency	94 l/cW	98 l/cW
 CRI	>80	>80
 Colour temperature	4000K	4000K
 Flicker-free	Yes	Yes
 Instant start up	Yes	Yes
 Warranty	5 years	5 years
 Lifespan estimate	50,000 hours	50,000 hours
Mount Options		
Suspended		
Surface		
BESA		
Exposed T Ceilings		
Options		
Low glare diffuser as standard		
Integral Emergency		

All Constant Lighting luminaires are designed and manufactured in Manchester allowing us to have the ability to tailor our designs to match your exact requirements.