


Sky High Bay

LED high ceiling applications




Designed exclusively for use 4meter and over situations, the Sky High Bay range is designed with a substantial lumen output of up-to 24,000 lumens, whilst only using 220 W of energy. This makes the Sky High-Bay lighting option a dramatic improvement over HID fittings for energy consumption as well as producing a much brighter, cleaner and professional lighting environment.

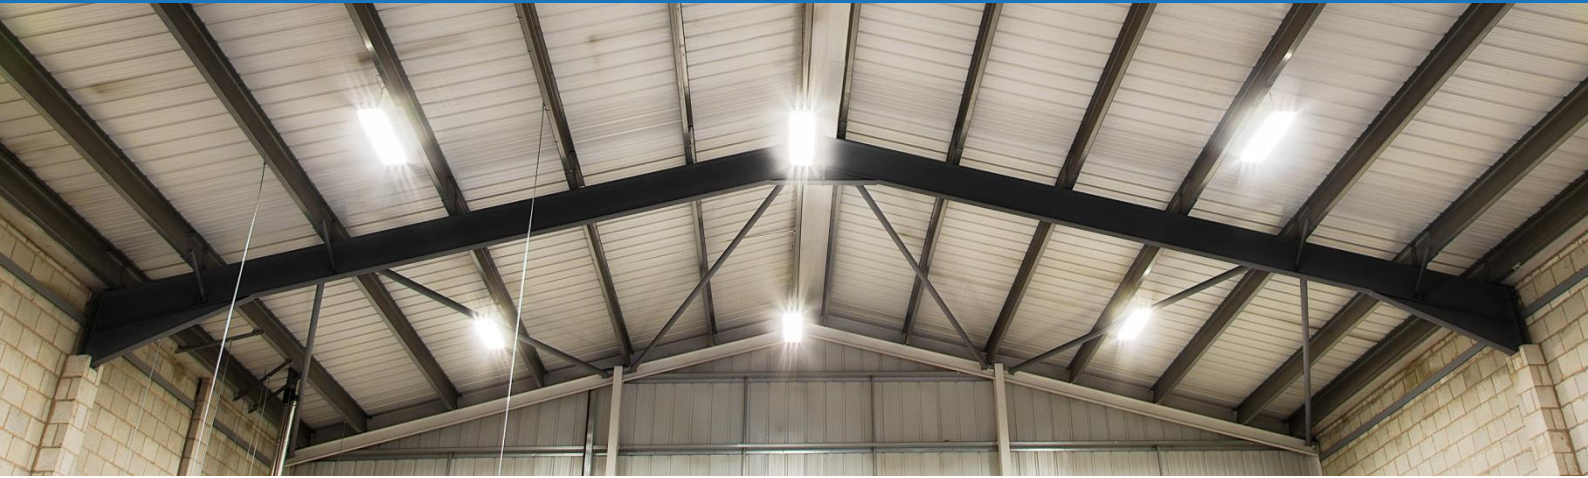

- **Up to 70% efficiency gains versus comparative HID fittings**
- Perfect replacements of traditional 250W/400W HID fittings
- Clear and brighter working environment
- Optional low glare diffuser
- Low maintenance, perfect for high-ceiling installations



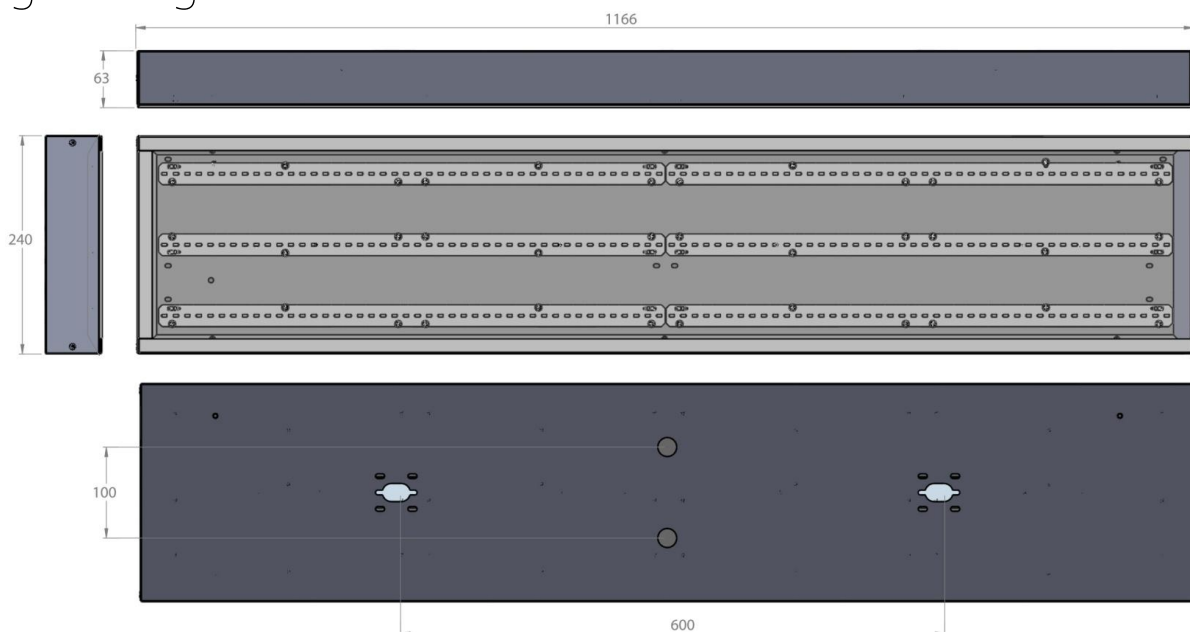



Range design



Sky High Bay

LED high ceiling applications

Range specification data

	Sky High Bay 100	Sky High Bay 200
Specification		
 Alternative to	250W/400W HID fittings	250W/400W HID fittings
 Efficiency	70%	70%
 Maintenance	Low	Low
 Dimensions (mm)	1166 x 240 x 63 mm	1727 x 240 x 63 mm
 IP Rating	20	20
 Lumen output	17,600 lm	26,420 lm
 Power consumption	146 W	220 W
 System efficiency	120 l/cW	120 l/cW
 CRI	>80	>80
 Colour temperature	4000K	4000K
 Flicker-free	Yes	Yes
 Instant start up	Yes	Yes
 Warranty	5 years	5 years
 Lifespan estimate	50,000 hours	50,000 hours
Mount Options		
Suspended		
Surface		
BESA		
Exposed T Ceilings		
Options		
Low glare diffuser		
Integral Emergency		

All Constant Lighting luminaires are designed and manufactured in Manchester allowing us to have the ability to tailor our designs to match your exact requirements.